
Product data sheet
Subminiature connectors

Product description	**M9 Male panel mount connector, Contacts: 4, unshielded, THT, IP40, M9x0,5, Rear mounting**
Area	**M9 IP40**
Series	**711**
Part no.	**09 0081 20 04**


Illustration (may vary)




Conductor layout

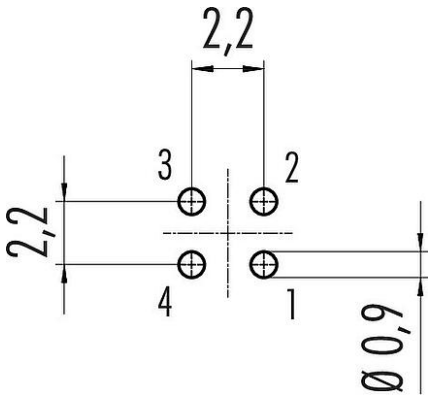

Scale drawing

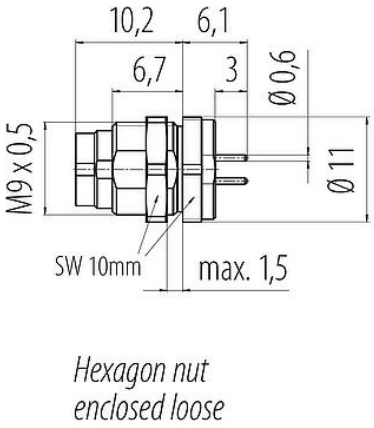

Contact arrangement (Plug-in side)

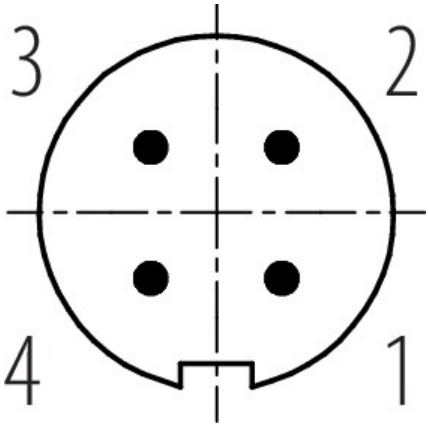

You can find the component part drawing and assembly instructions on the next page.

Technical data

General features

Part no.	09 0081 20 04
Connector design	Male panel mount connector
Version	Connector pin straight
Connector locking system	screw
Termination	THT

Product data sheet

Subminiature connectors

Product description	**M9 Male panel mount connector, Contacts: 4, unshielded, THT, IP40, M9x0,5, Rear mounting**
Area	**M9 IP40**
Series	**711**
Part no.	**09 0081 20 04**

Degree of protection	IP40
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 500 Mating cycles
Weight (g)	3.20
Customs tariff number	85369010
Country of Origin	DE

Electrical parameters

Rated voltage	125 V
Rated impulse voltage	1500 V
Rated current	3,0 A
Insulation resistance	≥ 10^{8} Ω
Pollution degree	1
Overvoltage category	II
Insulating material group	III
EMC compliance	unshielded

Material

Contact body material	PA (UL94 V-0)
Contact material	CuZn (brass)
Contact plating	Au (gold)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	a089e13d-aafa-4f15-9f30-10514baf5505

Classifications

eCl@ss 11.1	27-44-01-09
ETIM 9.0	EC003569


Trade-Compliance

Copper (9903.78.01)	0.000184 kg


Product data sheet
Subminiature connectors

Product description	**M9 Male panel mount connector, Contacts: 4, unshielded, THT, IP40, M9x0,5, Rear mounting**
Area	**M9 IP40**
Series	**711**
Part no.	**09 0081 20 04**

Assembly instructions / Panel cut-out

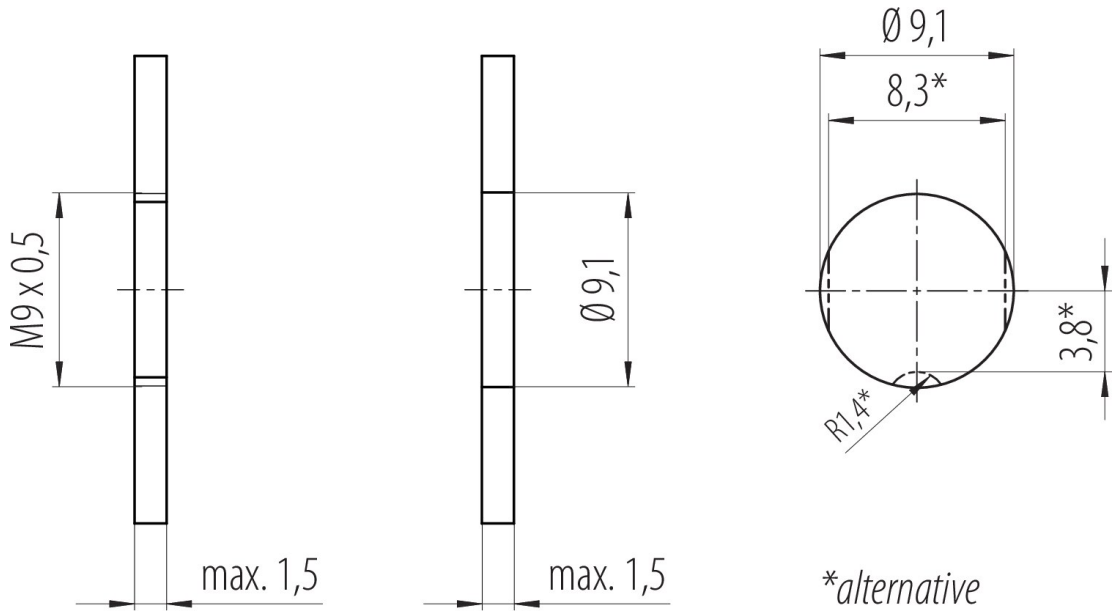

Component part drawing

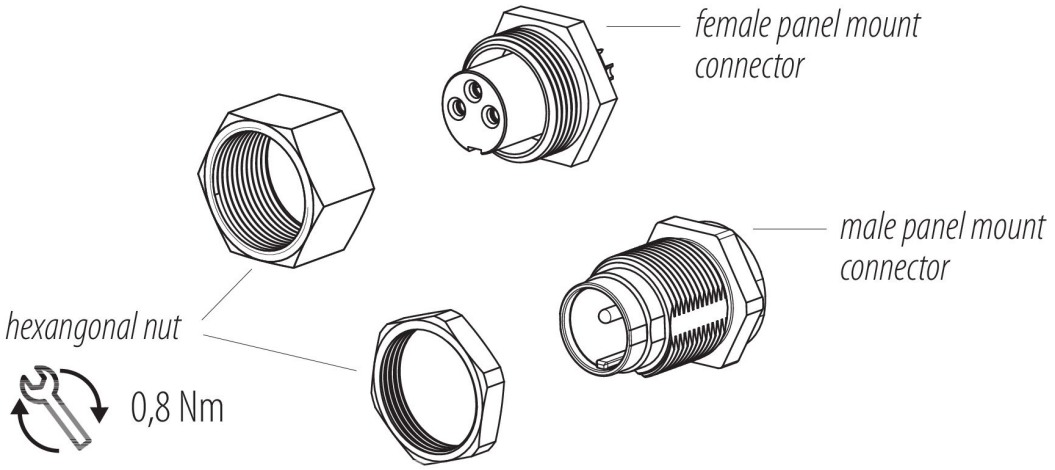

Product data sheet

Subminiature connectors

Product description	**M9 Male panel mount connector, Contacts: 4, unshielded, THT, IP40, M9x0,5, Rear mounting**
Area	**M9 IP40**
Series	**711**
Part no.	**09 0081 20 04**

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".