Product data sheet


Automation technology - Sensors and actuators

Product description	**M12 Female panel mount connector, Contacts: 5, shieldable, THR, IP68, UL 2238, M12x1.0, Front mounting, for PCB assembly**
Area	**M12-A**
Coding	**A-coded**
Series	**763**
Part no.	**99 3442 458 05**


Illustration (may vary)




Conductor layout

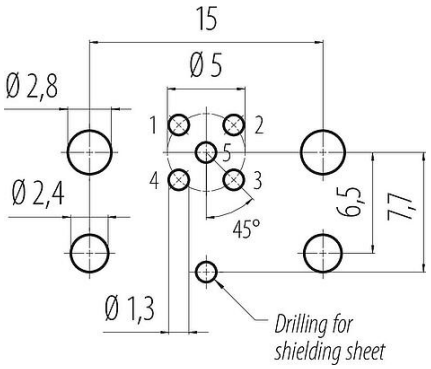

Scale drawing

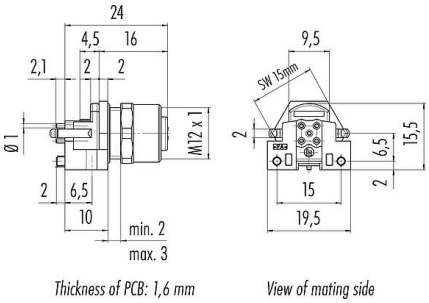

Contact arrangement (Plug-in side)

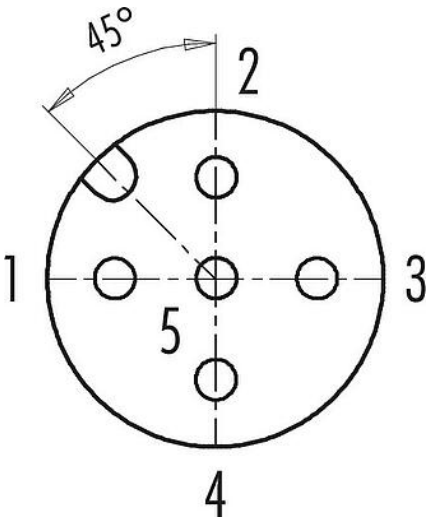

You can find the assembly instructions on the next page.

Technical data

General features

Part no.	99 3442 458 05
Connector design	Female panel mount connector
Type standard	DIN EN 61076-2-101
Coding	A-coded

Product data sheet

Automation technology - Sensors and actuators

Product description	**M12 Female panel mount connector, Contacts: 5, shieldable, THR, IP68, UL 2238, M12x1.0, Front mounting, for PCB assembly**
Area	**M12-A**
Coding	**A-coded**
Series	**763**
Part no.	**99 3442 458 05**

Version	Connector socket angled
Connector locking system	screw
Termination	THR
Degree of protection	IP68
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	11.35
Customs tariff number	85369010
Country of Origin	HU

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	1500 V
Rated current	4 A (3 A UL)
Insulation resistance	> 10^8 Ω
Pollution degree	3
Overvoltage category	II
Insulating material group	III
EMC compliance	shieldable
Shield connection	Shielding plate

Material

Housing material	CuZn (Brass nickel plated)
Contact body material	PA
Contact material	CuSn (bronze)
Contact plating	Au (gold)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	f49842f9-b9a1-4d36-87ec-b2c9a456bff5

Authorization/approvals

Approvals	UL 2238

Trade-Compliance

Copper (9903.78.01)	0.002108 kg


Product data sheet

Automation technology - Sensors and actuators


Product description	**M12 Female panel mount connector, Contacts: 5, shieldable, THR, IP68, UL 2238, M12x1.0, Front mounting, for PCB assembly**
Area	**M12-A**
Coding	**A-coded**
Series	**763**
Part no.	**99 3442 458 05**


Assembly instructions

1. *Fit the o-ring 12 x 1 onto the female panel mount connector sleeve and push it into the groove.*
2. *Push female panel mount connector sleeve through mounting wall.*
3. *Put on the nut and tighten it. Pay attention to the alignment of the female panel mount connector sleeve.*
4. *Insert the female insert into the female panel mount connector sleeve.*
5. *Thread the o-ring 7 x 1.2 onto the female insert and push it with a suitable tool in the direction of the stop surface of the female panel mount connector sleeve.*

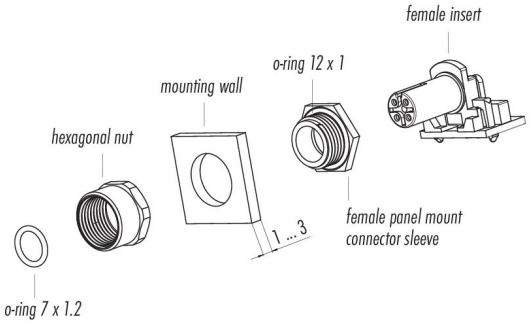

Assembly instructions / Panel cut-out

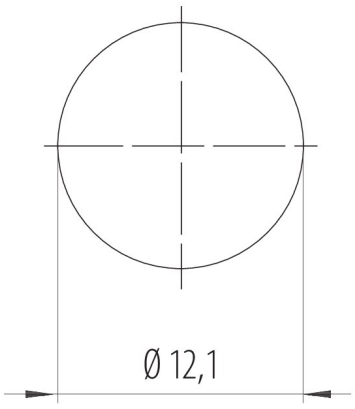

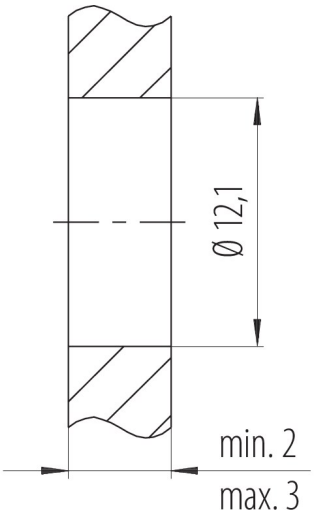

Tightening torque

M12 x 1 1,00 Nm

Product data sheet

Automation technology - Sensors and actuators

Product description	**M12 Female panel mount connector, Contacts: 5, shieldable, THR, IP68, UL 2238, M12x1.0, Front mounting, for PCB assembly**
Area	**M12-A**
Coding	**A-coded**
Series	**763**
Part no.	**99 3442 458 05**

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To protect against unintentional opening of the connector, the thread between the housing and the connector head must be secured with a suitable cyanoacrylate adhesive when used in circuits with voltages dangerous to the touch. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).

The user must take appropriate safety precautions to ensure that the connector cannot be accidentally disconnected. In addition, the user must ensure that the cable is suitably secured.