
Product data sheet
Miniature connectors

Product description	**M16 Female cable connector, Contacts: 4 (04-a), 6.0-8.0 mm, shieldable, screw clamp, IP40**
Area	**M16 IP40**
Series	**581**
Part no.	**99 2010 220 04**


Illustration (may vary)



Scale drawing

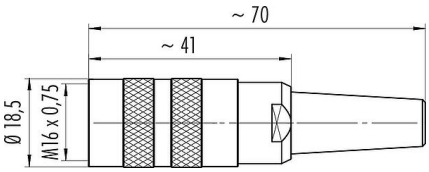

Contact arrangement (Plug-in side)

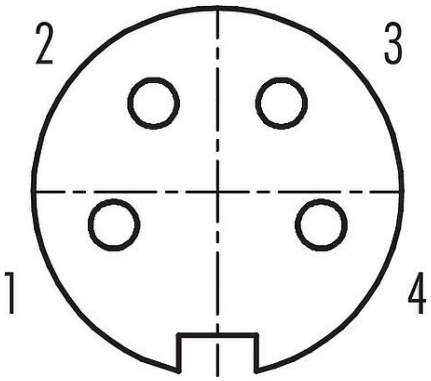

You can find the assembly instructions on the next page.

Technical data

General features

Part no.	99 2010 220 04
Connector design	Female cable connector
Type standard	DIN EN 61076-2-106
Version	Connector socket straight
Connector locking system	screw
Termination	screw clamp
Degree of protection	IP40
Connection cross-section	0.25-1.5 mm² / AWG 24-16
Cable outlet	6.0-8.0 mm
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 500 Mating cycles
Weight (g)	32.67
Customs tariff number	85369010
Country of Origin	DE

Electrical parameters

Rated voltage	250 V
Rated impulse voltage	1500 V
Rated current	6.0 A
Insulation resistance	≥ 10^{10} Ω
Pollution degree	1
Overvoltage category	I
Insulating material group	III
EMC compliance	shieldable
Shield connection	cable clamp

Product data sheet

Miniature connectors

Product description	**M16 Female cable connector, Contacts: 4 (04-a), 6.0-8.0 mm, shieldable, screw clamp, IP40**
Area	**M16 IP40**
Series	**581**
Part no.	**99 2010 220 04**

Material

Housing material	Zinc die-cast nickel-plated
Contact body material	PBT (UL94 V-0)
Contact material	CuSn (bronze)
Contact plating	Ag (silver)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	77a76508-6d85-4bf0-adbb-b05ff360f7f0

Classifications

eCl@ss 11.1	27-44-01-02
ETIM 9.0	EC002635


Declarations of conformity

Low Voltage Directive	EN 60529:1991 | EN 60204-1:2018

Trade-Compliance

Copper (9903.78.01)	0.000221 kg

Assembly instructions

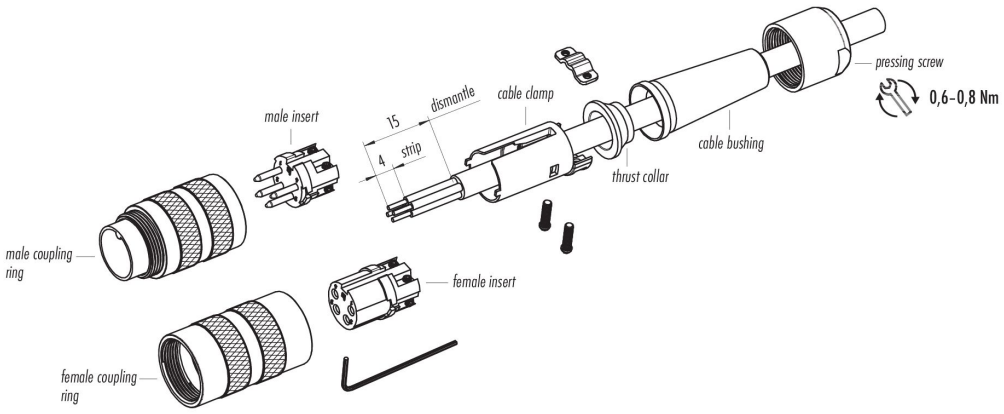

Product data sheet
Miniature connectors

Product description	**M16 Female cable connector, Contacts: 4 (04-a), 6.0-8.0 mm, shieldable, screw clamp, IP40**
Area	**M16 IP40**
Series	**581**
Part no.	**99 2010 220 04**

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To protect against unintentional opening of the connector, the thread between the housing and the connector head must be secured with a suitable cyanoacrylate adhesive when used in circuits with voltages dangerous to the touch. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).