Product data sheet


Automation technology - Sensors and actuators

Product description	**M12 Square male panel mount connector, Contacts: 4, unshielded, UL 2238, M3 (4x), Front mounting, Positionable coding alignment**
Area	**M12-A**
Coding	**A-coded**
Series	**763**
Part no.	**99 3433 200 04**


Illustration (may vary)



Scale drawing

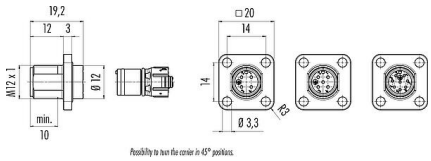

Contact arrangement (Plug-in side)

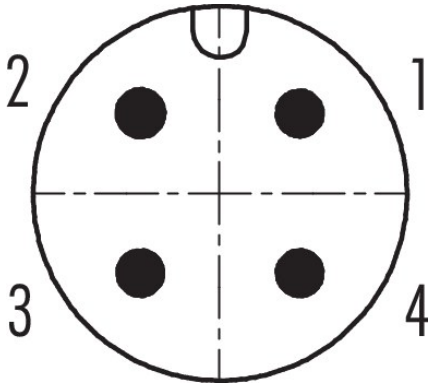

You can find the assembly instructions on the next page.

Technical data

General features

Part no.	99 3433 200 04
Connector design	Square male panel mount connector
Type standard	DIN EN 61076-2-101
Coding	A-coded
Version	Connector pin straight
Connection cross-section	AWG 22
Weight (g)	8.69
Customs tariff number	85369010
Country of Origin	DE

Electrical parameters

Rated voltage	250 V
Rated impulse voltage	2500 V
Rated current	4 A (3 A UL)
Insulating material group	II
EMC compliance	unshielded

Material

Housing material	CuZn (Brass nickel plated)
Contact body material	black
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	f7ccecb9-57b7-457c-887a-c56ebe77dcd5

Product data sheet

Automation technology - Sensors and actuators

Product description	**M12 Square male panel mount connector, Contacts: 4, unshielded, UL 2238, M3 (4x), Front mounting, Positionable coding alignment**
Area	**M12-A**
Coding	**A-coded**
Series	**763**
Part no.	**99 3433 200 04**


Authorization/approvals

Approvals	UL 2238

Trade-Compliance

Copper (9903.78.01)	0.002100 kg

Assembly instructions



Assembly:

1. *Insert the insert into the housing in the desired mounting position until it locks securely into place.*

Disassembly:


1. *Press the locking lever.*
2. *Simultaneously, without damaging the contacts, push out the contact body from plug-in side with a suitable object.*

Product data sheet

Automation technology - Sensors and actuators

Product description	**M12 Square male panel mount connector, Contacts: 4, unshielded, UL 2238, M3 (4x), Front mounting, Positionable coding alignment**
Area	**M12-A**
Coding	**A-coded**
Series	**763**
Part no.	**99 3433 200 04**

Assembly instructions / Panel cut-out

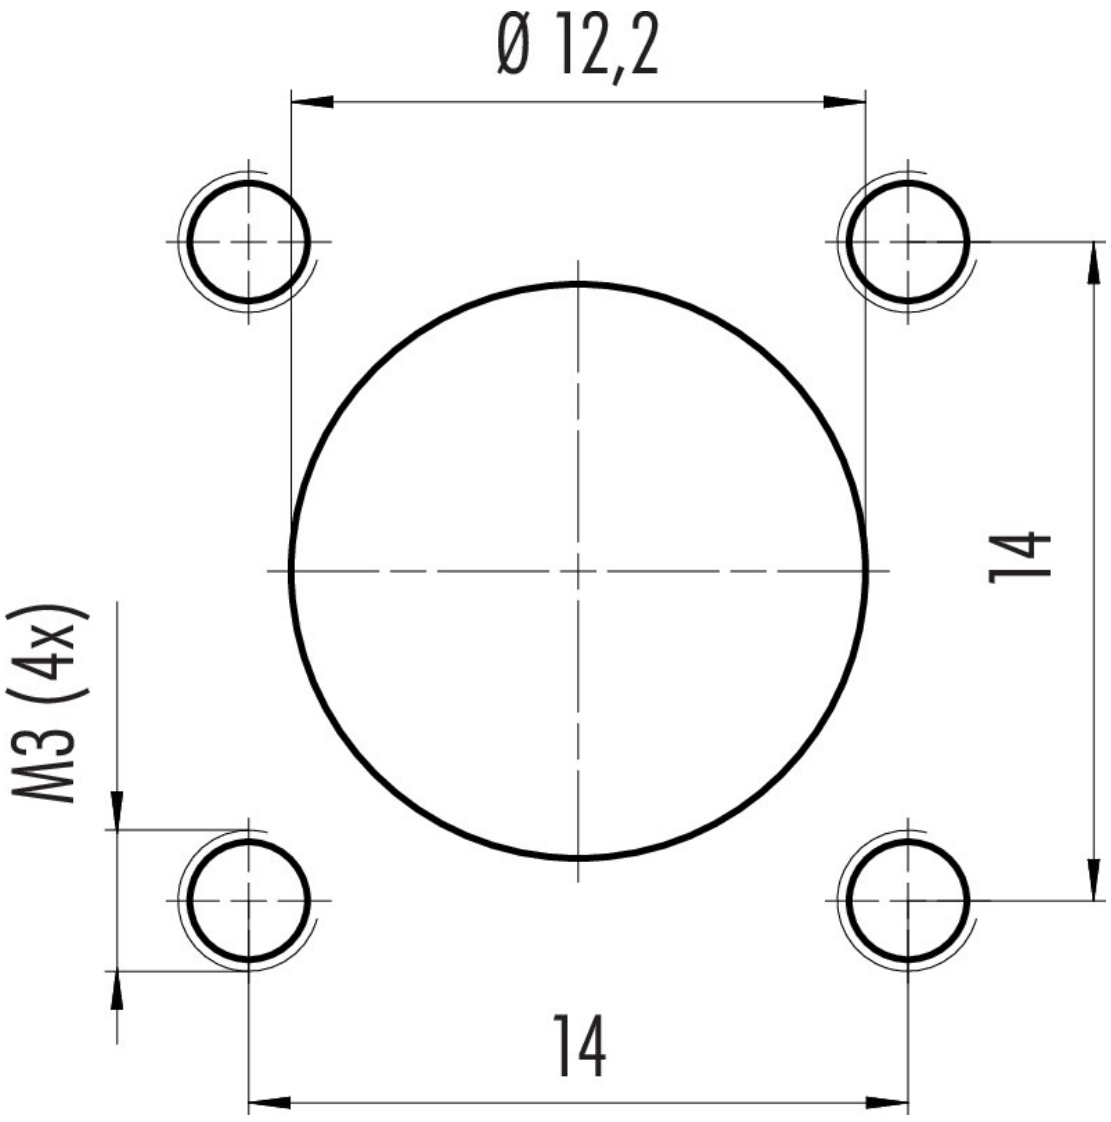

Product data sheet

Automation technology - Sensors and actuators

Product description	**M12 Square male panel mount connector, Contacts: 4, unshielded, UL 2238, M3 (4x), Front mounting, Positionable coding alignment**
Area	**M12-A**
Coding	**A-coded**
Series	**763**
Part no.	**99 3433 200 04**

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To protect against unintentional opening of the connector, the thread between the housing and the connector head must be secured with a suitable cyanoacrylate adhesive when used in circuits with voltages dangerous to the touch. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).

The protection class specification applies on condition that the four mounting holes are made as blind holes.