

LUMOTAST 75 IP65, illuminated pushbutton, round collar,
protruding bezel, latching, 1 NC + 1 NO



Description

LUMOTAST 75 illuminated pushbuttons and signal lamps have been in use for decades. They are the most successful mono-switches in RAFI history. The wide range of collar shapes in classic design and the established terminal and legending concept make the LUMOTAST 75 series one of your most reliable components. The pushbuttons and signal lamps are available in IP 65 protection class according to DIN. They come with a 2.5 mm higher collar than the variant with IP 40, due to the additional seal. Lenses and diffusing discs must be ordered separately.



technical data

> general

Collar color	black
Collar shape	round
Operating temperature, min.	-25 °C
Operating temperature, max.	55 °C
Storage temperature, min.	-40 °C
Storage temperature, max.	80 °C
illuminated	Yes
Lamp socket	T4.5
Packaging	Box
Packaging unit	5 pcs.
Net weight	13 g
Operating life electrical	10.000 (4A / 250V AC) cycles 50.000 (2A / 250V AC) cycles
B10	65,000 cycles
Degree of protection, front side, according to DIN EN 60529	IP65
Environment resistance	IEC 60068-2-14 IEC 60068-2-30 IEC 60068-2-33 IEC 60068-2-78
Protection class	II
Minimum order quantity (MOQ)	20 pcs.
RoHS compliant	Yes
REACH compliant	Yes
Country of origin	HU

direct links

> RAFI eCatalog

> mounting diameters

Outside dimension, length	19 mm
Outside dimension, width	19 mm
Mounting hole	16.2 mm
Mounting depth	57.5 mm

Installation height 10.5 mm

Collar dimension 19 mm

➤ **mechanical data**

Terminal on the rear Solder terminal

Fixing Threaded ring

Actuation function latching

Operating force, max. 6.5 N

Operating force, min. 3 N

Operating travel, max. 2.5 mm

Contact function 1 NC + 1 NO

Contact system Bridge-snap-action contact

Contact material Silver

Solderability Yes

➤ **electrical data**

Rated voltage, min. 12 V


Rated voltage, max. 230 V

Rated current, min. 0.05 A

Rated current, max. 4 A

drawings

Dimensioned drawing

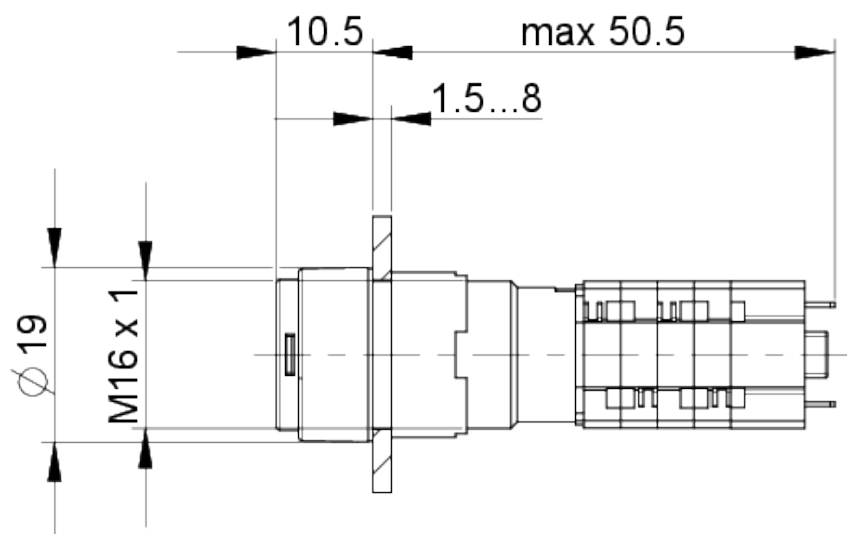

Mounting hole drawing

