
Product data sheet
Power connectors

Product description	**RD24 Female panel mount connector, Contacts: 3+PE, unshielded, screw clamp, IP67, UL, ESTI+, VDE, Front mounting**
Area	**RD24**
Series	**693**
Part no.	**09 4224 150 04**


Illustration (may vary)



Scale drawing

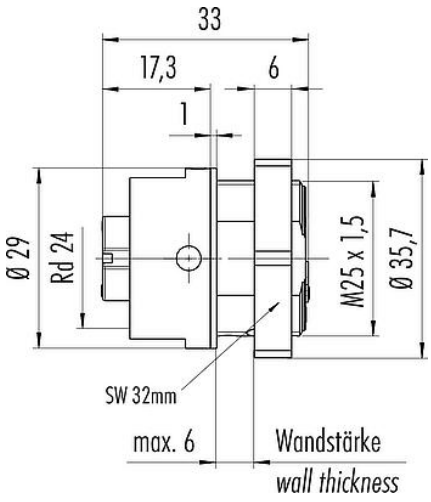

Contact arrangement (Plug-in side)

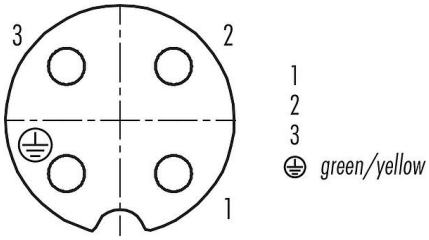

You can find the assembly instructions on the next page.

Technical data

General features

Part no.	09 4224 150 04
Connector design	Female panel mount connector
Version	Connector socket straight
Connector locking system	Central bolt
Termination	screw clamp
Degree of protection	IP67
Connection cross-section	max. 2.50 mm² / AWG 14
Temperature range from/to	-40 °C / 100 °C
Mechanical operation	> 500 Mating cycles
Weight (g)	22.80
Customs tariff number	85369010
Country of Origin	DE

Electrical parameters

Rated voltage	400 V (600 V UL)
Rated impulse voltage	6000 V
Rated current	16 A (12 A UL)
Insulation resistance	≥ 10^{10} Ω
Pollution degree	3
Overvoltage category	III
Insulating material group	III
EMC compliance	unshielded

Product data sheet

Power connectors

Product description	**RD24 Female panel mount connector, Contacts: 3+PE, unshielded, screw clamp, IP67, UL, ESTI+, VDE, Front mounting**
Area	**RD24**
Series	**693**
Part no.	**09 4224 150 04**

Material

Contact body material	PA
Contact material	CuZn (brass)
Contact plating	Ag (silver)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	4265e0e5-b10b-45a4-a7b7-e9d29db2298a

Authorization/approvals

Approvals	UL, ESTI+, VDE

Classifications

eCl@ss 11.1	27-44-01-09
ETIM 9.0	EC003569

Product data sheet

Power connectors


Product description	**RD24 Female panel mount connector, Contacts: 3+PE, unshielded, screw clamp, IP67, UL, ESTI+, VDE, Front mounting**
Area	**RD24**
Series	**693**
Part no.	**09 4224 150 04**

Date: 03.10.2026

Product data sheet
Power connectors

Product description	**RD24 Female panel mount connector, Contacts: 3+PE, unshielded, screw clamp, IP67, UL, ESTI+, VDE, Front mounting**
Area	**RD24**
Series	**693**
Part no.	**09 4224 150 04**

Assembly instructions / Panel cut-out

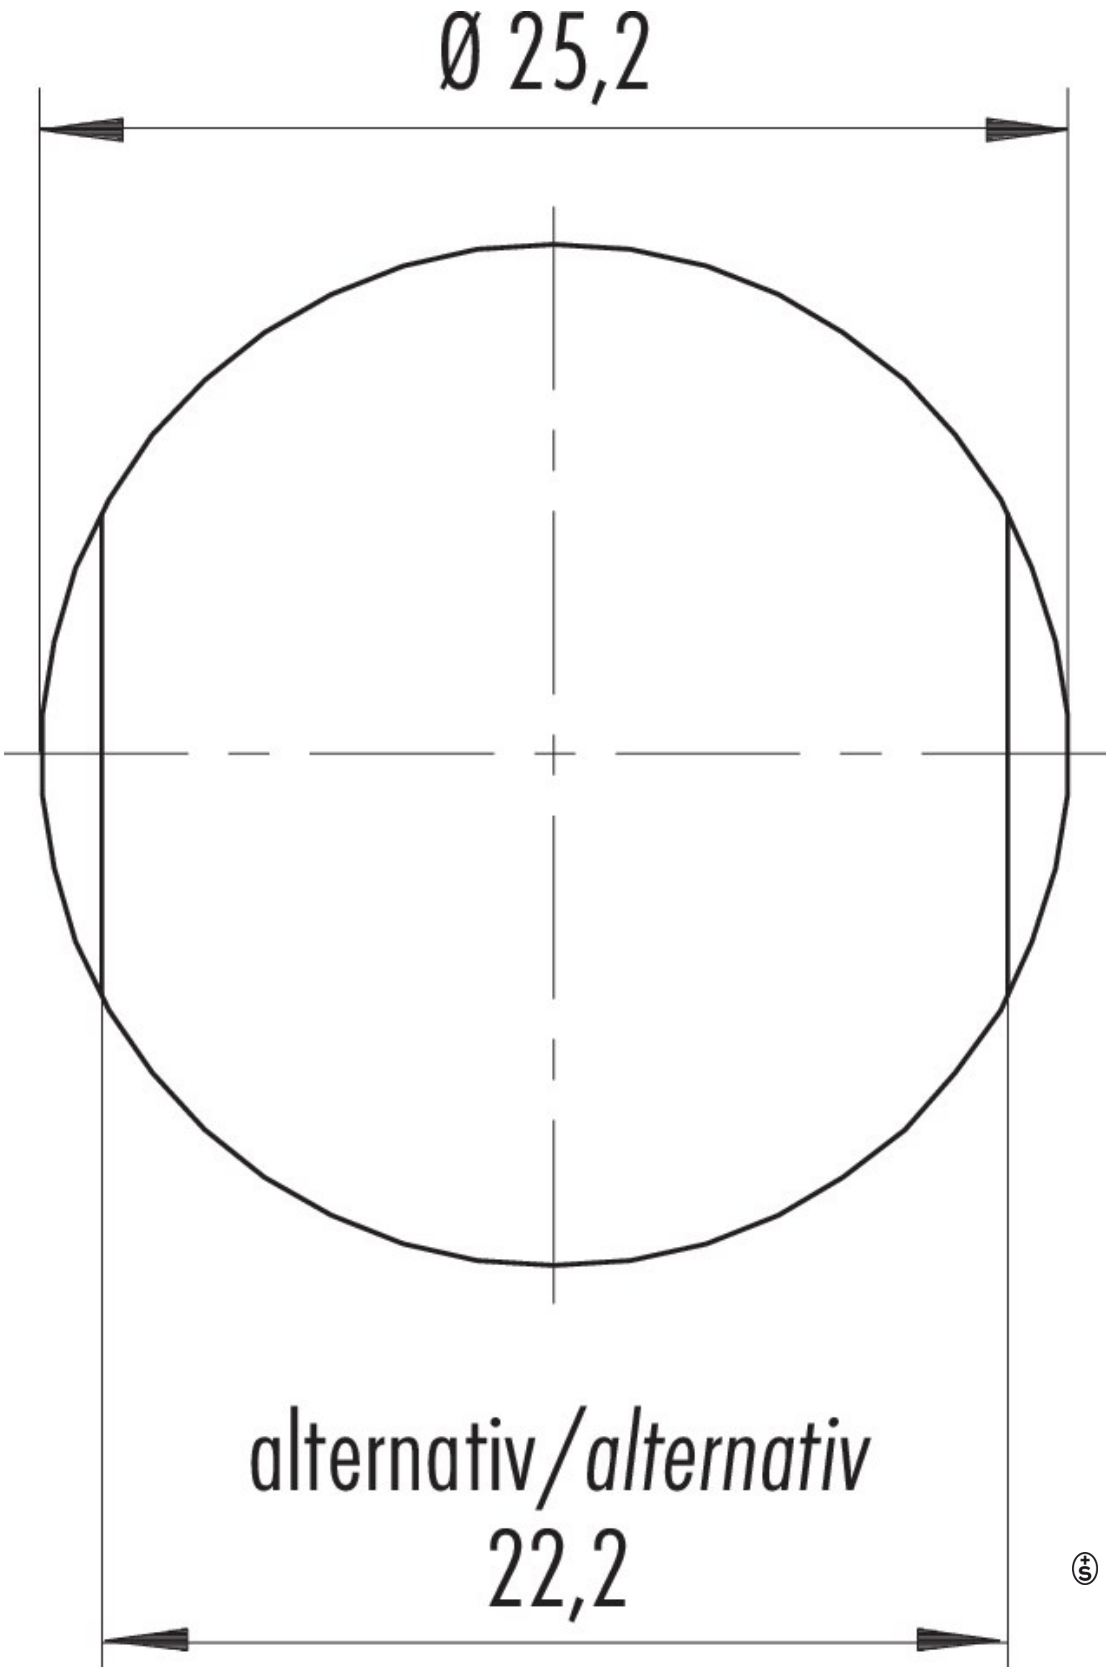


Date: 03.10.2026

Product data sheet
Power connectors

Product description	**RD24 Female panel mount connector, Contacts: 3+PE, unshielded, screw clamp, IP67, UL, ESTI+, VDE, Front mounting**
Area	**RD24**
Series	**693**
Part no.	**09 4224 150 04**

Derating curve

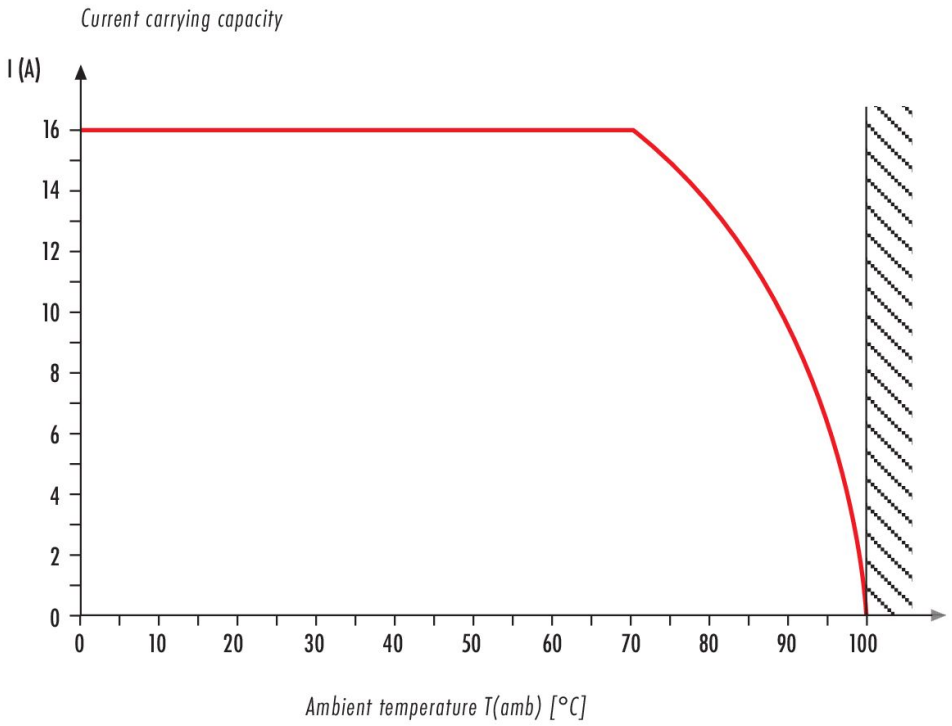

Product data sheet
Power connectors

Product description	**RD24 Female panel mount connector, Contacts: 3+PE, unshielded, screw clamp, IP67, UL, ESTI+, VDE, Front mounting**
Area	**RD24**
Series	**693**
Part no.	**09 4224 150 04**

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".