
Product data sheet
Automation technology - Sensors and actuators

Product description	**M12/M8 Male angled cable splitter - 2 female cable connectors, Contacts: 4/3, unshielded, moulded on the cable, IP67, UL 2238, PUR, black, 3 x 0.34 mm², 1 m**
Area	**M12**
Coding	**A-coded**
Series	**765**
Part no.	**77 9827 3406 50003-0100**


Illustration (may vary)




Pin assignment plans

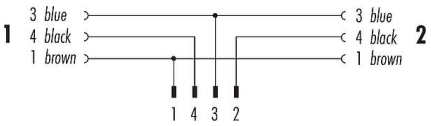

Scale drawing

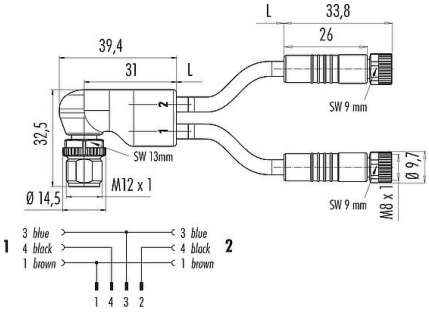

Contact arrangement (Plug-in side)

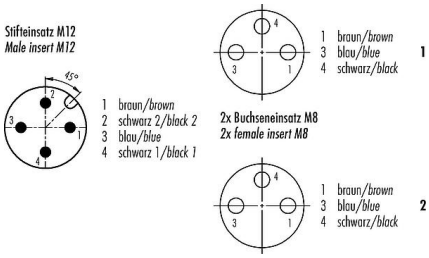

Cable length tolerance

cable length	tolerance
≥ 0,10 m	+ 0,03 m
≥ 0,20 m	+ 0,04 m
≥ 0,50 m	+ 0,07 m
≥ 1,00 m	+ 0,10 m
≥ 2,00 m	+ 0,15 m
≥ 5,00 m	+ 0,20 m
≥ 10,0 m	+ 0,25 m
≥ 20,0 m	+ 0,35 m

Technical data

General features

Part no.	77 9827 3406 50003-0100
Connector design	Male angled cable splitter - 2 female cable connectors
Type standard	DIN EN 61076-2-104 DIN EN 61076-2-101
Coding	A-coded
Cable length	1 m (Standard 1 m and 2 m. Other lengths are available on request.)

Product data sheet

Automation technology - Sensors and actuators

Product description	**M12/M8 Male angled cable splitter - 2 female cable connectors, Contacts: 4/3, unshielded, moulded on the cable, IP67, UL 2238, PUR, black, 3 x 0.34 mm², 1 m**
Area	**M12**
Coding	**A-coded**
Series	**765**
Part no.	**77 9827 3406 50003-0100**

Version	Cable splitters
Connector locking system	screw
Termination	moulded on the cable
Degree of protection	IP67
Connection cross-section	0.34 mm² / AWG 22
Temperature range from/to	-25 °C / 85 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	97.61
Customs tariff number	85444290
Country of Origin	DE

Electrical parameters

Rated voltage	30 V
Rated impulse voltage	800 V
Rated current	4.0 A
Pollution degree	3
Overvoltage category	II
Insulating material group	II
EMC compliance	unshielded

Material

Housing material	PUR
Contact body material	PUR
Contact material	CuZn (brass) / CuSn (bronze)
Contact plating	Au (gold)
Locking material	Zinc die-cast nickel-plated
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	e18e33af-2d3b-4b13-9d87-0795312243c8

Cable data - Structure of the cable

Cable diameter	4.3 mm
Cross section	3 x 0.34 mm²
Sheath material	PUR
Single-lead insulation	PP9Y halogen-free
Single-lead structure	43 x 0.10 mm
Cable color	black

Cable data - Electrical properties

Conductor resistance	60 Ω/Km (20°C)

Product data sheet

Automation technology - Sensors and actuators

Product description	**M12/M8 Male angled cable splitter - 2 female cable connectors, Contacts: 4/3, unshielded, moulded on the cable, IP67, UL 2238, PUR, black, 3 x 0.34 mm², 1 m**
Area	**M12**
Coding	**A-coded**
Series	**765**
Part no.	**77 9827 3406 50003-0100**

Cable data - Mechanical properties

Bending radius, fixed cable	≥ 5 x Ø
Bending radius, moving cable	≥ 10 x Ø
Bending cycles	> 5 million
Permitted acceleration	≥ 5 m/s²
Travel distance, horizontal	≥ 5 m
Travel distance, vertical	≥ 5 m
Travel speed	≤ 200 m/min

Cable data - Thermal properties

Temperature range cable in move from/to	-25 °C / 80 °C
Temperature range cable fixed from/to	-50 °C / 80 °C

Cable data - Other features

Halogen free	yes

Authorization/approvals

Approvals	UL 2238

Classifications

eCl@ss 11.1	27-06-03-11
ETIM 9.0	EC002638

Declarations of conformity

RoHS Directive	EN IEC 63000:2018