
Product data sheet
Subminiature connectors

Product description	**M9 Male cable connector, Contacts: 4, 4.0-5.5 mm, shieldable, solder, IP67, iris spring**
Area	**M9 IP67**
Series	**712**
Part no.	**99 0409 115 04**


Illustration (may vary)



Scale drawing

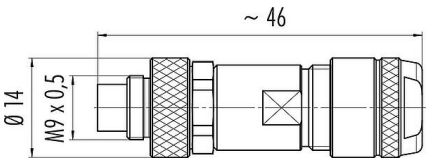

Contact arrangement (Plug-in side)

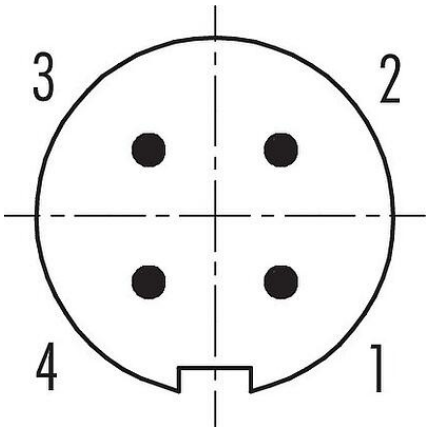

You can find the assembly instructions on the next page.

Technical data

General features

Part no.	99 0409 115 04
Connector design	Male cable connector
Version	Connector pin straight
Connector locking system	screw
Termination	solder
Degree of protection	IP67
Connection cross-section	max. 0.25 mm² / AWG 24
Cable outlet	4.0-5.5 mm
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 500 Mating cycles
Weight (g)	24.01
Customs tariff number	85369010
Country of Origin	DE

Electrical parameters

Rated voltage	125 V
Rated impulse voltage	1500 V
Rated current	3,0 A
Insulation resistance	≥ 10^8 Ω
Pollution degree	1
Overvoltage category	II
Insulating material group	III
EMC compliance	shieldable
Shield connection	Iris type spring

Product data sheet

Subminiature connectors

Product description	**M9 Male cable connector, Contacts: 4, 4.0-5.5 mm, shieldable, solder, IP67, iris spring**
Area	**M9 IP67**
Series	**712**
Part no.	**99 0409 115 04**

Material

Contact body material	PBT (UL94 V-0)
Contact material	CuZn (brass)
Contact plating	Au (gold)
Locking material	CuZn (brass)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	c6990467-b5f2-4beb-acc5-e1466cabaa08

Classifications

eCl@ss 11.1	27-44-01-02
ETIM 9.0	EC002635

Declarations of conformity

Low Voltage Directive	EN 60529:1991 | EN 60204-1:2018


Product data sheet
Subminiature connectors

Product description	**M9 Male cable connector, Contacts: 4, 4.0-5.5 mm, shieldable, solder, IP67, iris spring**
Area	**M9 IP67**
Series	**712**
Part no.	**99 0409 115 04**

Assembly instructions


Shield-diameter > 3,5 mm

1. *Bead housing to cable.*
2. *Strip single wires, shorten shielding braid.*
3. *Solder single wires.*
4. *Screw housing to contact insert and fix pressing screw.*

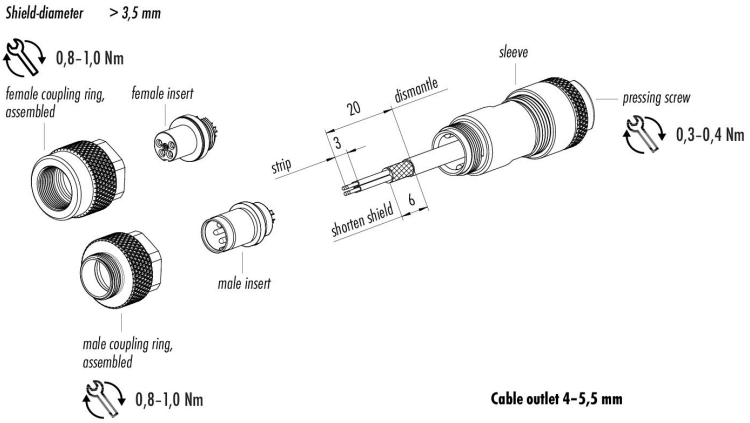

Shield-diameter ≤ 3,5 mm

1. *Bead housing to cable.*
2. *Strip single cores, shorten shielding braid, put braid over cable coating, wrap it aprox. 1 1/2 times with shielded copper tape and shorten tape.*
3. *Solder wires.*
4. *Screw housing to male or female contact carrier and fix pressing screw.*

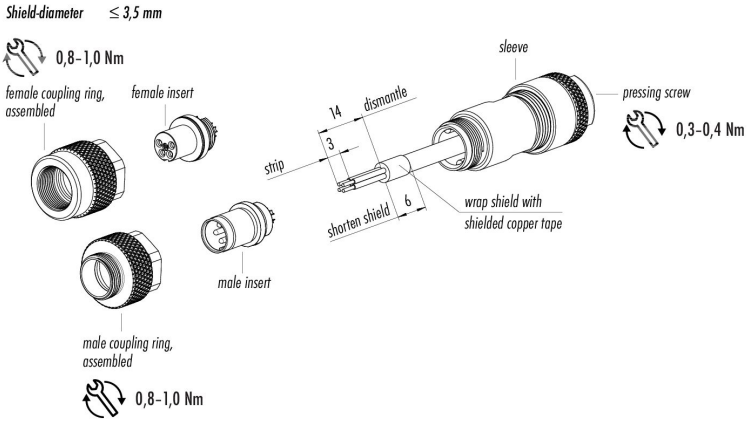

Product data sheet
Subminiature connectors

Product description	**M9 Male cable connector, Contacts: 4, 4.0-5.5 mm, shieldable, solder, IP67, iris spring**
Area	**M9 IP67**
Series	**712**
Part no.	**99 0409 115 04**

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To protect against unintentional opening of the connector, the thread between the housing and the connector head must be secured with a suitable cyanoacrylate adhesive when used in circuits with voltages dangerous to the touch. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".