
Product data sheet
Subminiature connectors

Product description	**M9 Male cable connector, Contacts: 7, 4.0-5.0 mm, unshielded, solder, IP40**
Area	**M9 IP40**
Series	**711**
Part no.	**99 0475 102 07**


Illustration (may vary)



Scale drawing

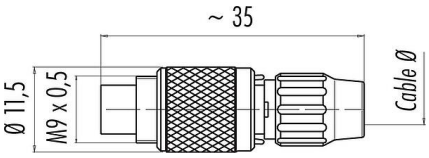

Contact arrangement (Plug-in side)

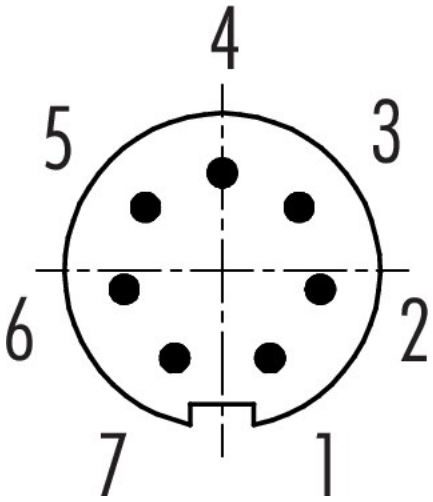

You can find the assembly instructions on the next page.

Technical data

General features

Part no.	99 0475 102 07
Connector design	Male cable connector
Version	Connector pin straight
Connector locking system	screw
Termination	solder
Degree of protection	IP40
Connection cross-section	max. 0.14 mm² / AWG 26
Cable outlet	4.0-5.0 mm
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 500 Mating cycles
Weight (g)	5.69
Customs tariff number	85369010
Country of Origin	DE

Electrical parameters

Rated voltage	125 V
Rated impulse voltage	1500 V
Rated current	1.0 A
Insulation resistance	≥ 10^8 Ω
Pollution degree	1
Overvoltage category	II

Product data sheet
Subminiature connectors

Product description	**M9 Male cable connector, Contacts: 7, 4.0-5.0 mm, unshielded, solder, IP40**
Area	**M9 IP40**
Series	**711**
Part no.	**99 0475 102 07**

Insulating material group	III
EMC compliance	unshielded

Material

Housing material	PA
Contact body material	PA (UL94 V-0)
Contact material	CuZn (brass)
Contact plating	Au (gold)
Locking material	CuZn (brass)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	5c42af9f-a5f3-4c9b-bc3b-95642037725c

Classifications

eCl@ss 11.1	27-44-01-02
ETIM 9.0	EC002635

Declarations of conformity


Low Voltage Directive	EN 60529:1991 | EN 60204-1:2018

Trade-Compliance

Copper (9903.78.01)	0.000221 kg

Assembly instructions

1. *Bead pressing screw to cable.*
2. *Dismantle cable to 15 mm length.*
3. *Strip and solder single wires.*
3. *Mount male insert into sleeve with distance t.*
4. *Insert sleeve with male insert into carrier sleeve part 2 (lower part grey).*
5. *Mount carrier sleeve part 1 (upper part black) on carrier sleeve part 2 (lower part grey).*
6. *Snap over coupling ring.*
7. *Tighten pressing screw.*

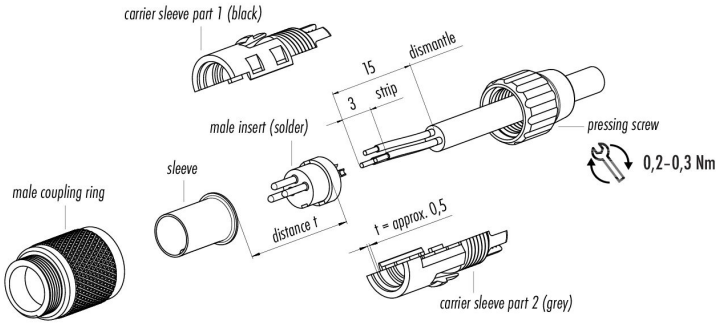

Attention: *max. torque of ring nut in socket connector: 50cNm (manual adjustment)*

Product data sheet
Subminiature connectors

Product description	**M9 Male cable connector, Contacts: 7, 4.0-5.0 mm, unshielded, solder, IP40**
Area	**M9 IP40**
Series	**711**
Part no.	**99 0475 102 07**

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To protect against unintentional opening of the connector, the thread between the housing and the connector head must be secured with a suitable cyanoacrylate adhesive when used in circuits with voltages dangerous to the touch. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".