**Product data sheet**


# Automation technology - Voltage and Power Supply

| | |
|---|---|
| Product description | **M12 Female cable connector, Contacts: 4, 8.0-10.0 mm, unshielded, screw clamp, IP67, stainless steel** |
| Area | **M12-T** |
| Coding | **T-coded** |
| Series | **813** |
| Part no. | **99 0630 80 04** |


## Illustration (may vary)



## Scale drawing

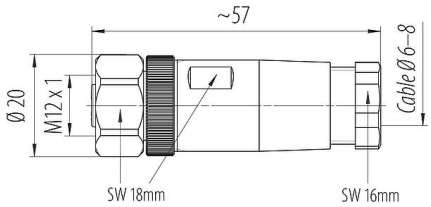


## Contact arrangement (Plug-in side)

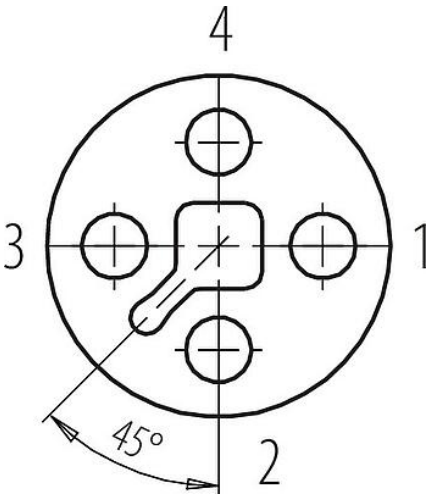


**You can find the assembly instructions on the next page.**

## Technical data

### General features

| | |
|---|---|
| Part no. | 99 0630 80 04 |
| Connector design | Female cable connector |
| Coding | T-coded |
| Version | Connector socket straight |
| Connector locking system | screw |
| Termination | screw clamp |
| Degree of protection | IP67 |
| Connection cross-section | max. 1.50 mm² / AWG 16 |
| Cable outlet | 8.0-10.0 mm |
| Temperature range from/to | -40 °C / 85 °C |
| Mechanical operation | > 100 Mating cycles |
| Weight (g) | 27.57 |
| Customs tariff number | 85369010 |
| Country of Origin | DE |

### Electrical parameters

| | |
|---|---|
| Rated voltage | 63 V |
| Rated impulse voltage | 1500 V |
| Rated current | 12.0 A |
| Pollution degree | 3 |

**Product data sheet**

# Automation technology - Voltage and Power Supply

| | |
|---|---|
| Product description | **M12 Female cable connector, Contacts: 4, 8.0-10.0 mm, unshielded, screw clamp, IP67, stainless steel** |
| Area | **M12-T** |
| Coding | **T-coded** |
| Series | **813** |
| Part no. | **99 0630 80 04** |

| | |
|---|---|
| Overvoltage category | III |
| Insulating material group | III |
| EMC compliance | unshielded |

## Material


| | |
|---|---|
| Housing material | PA |
| Contact body material | PA |
| Contact material | CuZn (brass) |
| Contact plating | Au (gold) |
| Locking material | Stainless steel |
| REACH SVHC | CAS 7439-92-1 (Lead) |
| SCIP number | d6806bae-83a0-44aa-9550-e2a5d69450a5 |

## Trade-Compliance

| | |
|---|---|
| Copper (9903.78.01) | 0.000221 kg |

## Assembly instructions

1. Bead pre-assembled housing to cable (consisting of: sleeve, seal, pinch ring and pressing screw).
2. Dismantle cable and strip single wires.
3. Screw on single wires (0.4 Nm).
4. Screw sleeve to male/female insert.
5. Push seal and pinch ring into coupling sleeve.
6. Tighten pressing screw.

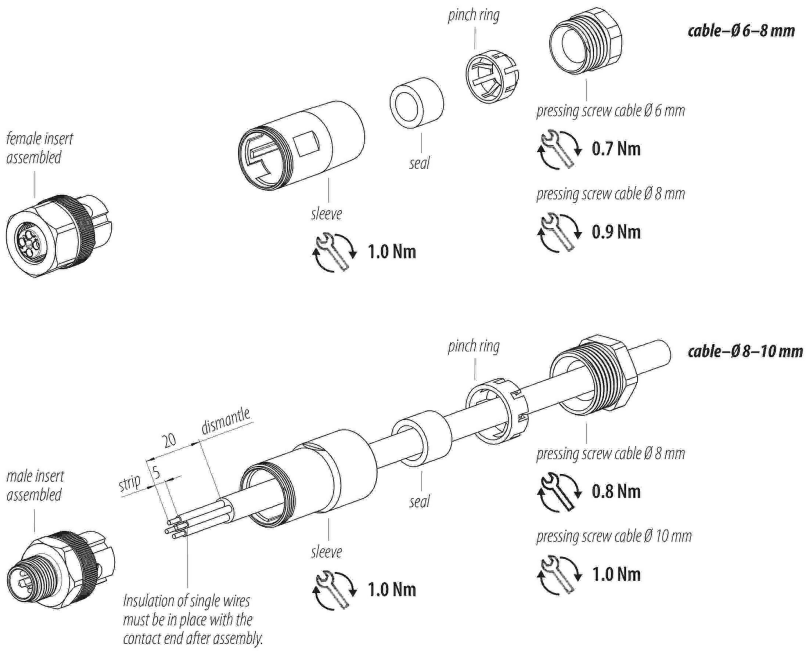

**Product data sheet**

# Automation technology - Voltage and Power Supply

| | |
|---|---|
| Product description | **M12 Female cable connector, Contacts: 4, 8.0-10.0 mm, unshielded, screw clamp, IP67, stainless steel** |
| Area | **M12-T** |
| Coding | **T-coded** |
| Series | **813** |
| Part no. | **99 0630 80 04** |

## Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To protect against unintentional opening of the connector, the thread between the housing and the connector head must be secured with a suitable cyanoacrylate adhesive when used in circuits with voltages dangerous to the touch. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).