

## RAMO 30 F, USB, round collar, frontring stainless steel, USB 3.0 type A with cable 55 cm



### Description

Cable feed-through for front panels. Front side USB 3.0 or RJ45, rear side with corresponding sockets in the housing or 55 cm cable and socket.



### technical data

#### > general

Collar color	black
Front ring color	stainless steel
Collar shape	round
Operating temperature, min.	-25 °C
Operating temperature, max.	70 °C
Storage temperature, min.	-40 °C
Storage temperature, max.	90 °C
illuminated	No
Packaging	Box
Packaging unit	2 pcs.
Net weight	65.2 g
Operating life	1,500 cycles
Degree of protection, front side, according to DIN EN 60529	IP65 with sealing cap
Environment resistance	IEC 60068-2-14 IEC 60068-2-30 IEC 60068-2-78
Impact resistance IK	04 side
Minimum order quantity (MOQ)	2 pcs.
RoHS compliant	Yes
REACH compliant	Yes
Country of origin	HU

#### > mounting diameters

Outside dimension, length	34.5 mm
Outside dimension, width	34.5 mm
Outside dimension, height	45.2 mm
Mounting hole	30.3 mm
Mounting depth	32.82 mm
Installation height	5.25 mm
Grid, min.	35 mm
Collar dimension	34.5 mm

#### direct links

> [RAFI eCatalog](#)

**> mechanical data**


Front side terminal	USB 3.0 type A
Terminal on the rear	USB 3.0 type A with cable 55 cm
Fixing	Threaded ring
Threaded ring torque, max.	1.2 Nm

**> Specifications according to UL 60947**

UL Enclosure Type Rating front side	type 4X indoor
Operating temperature, max. to UL/TÜV	70 °C

**drawings**

**Dimensioned drawing**

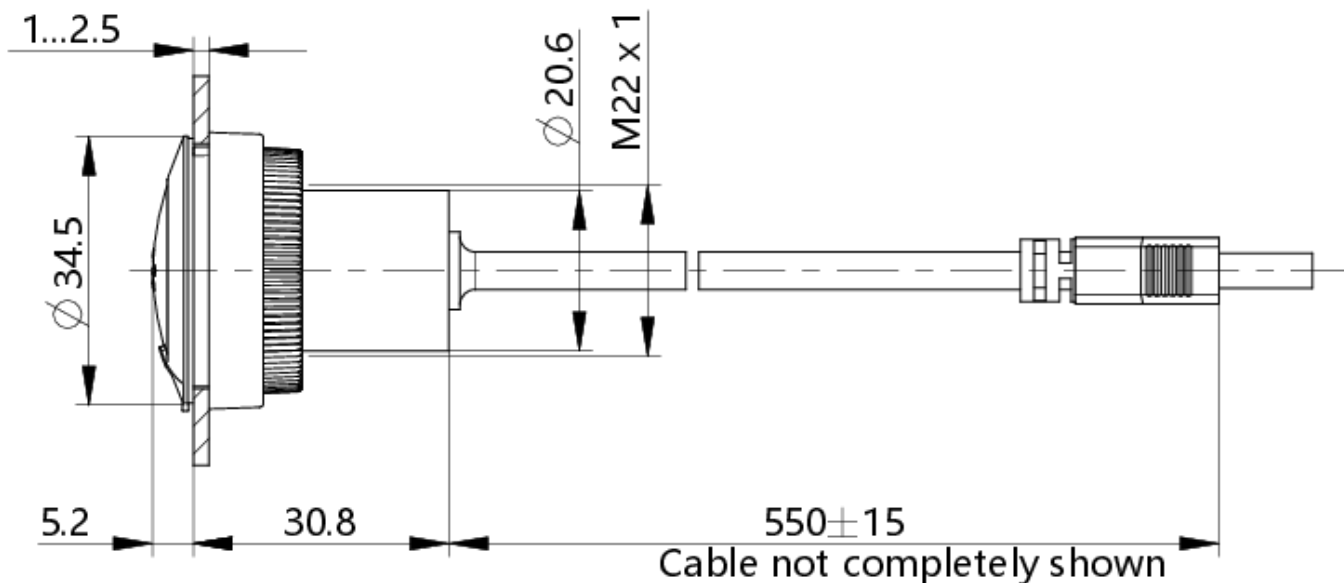

**Mounting hole drawing**

