




CDS4x4-43-617/3800-ECO

4 x 4 Hybrid Coupler

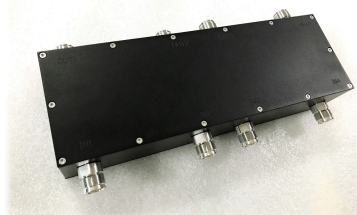

The CDS4x4-43-617/3800-ECO hybrid coupler which equally combines four wireless signals and transfers the combined signal to four output ports. The product is designed for wireless services and applications in the frequency band from 617-3800MHz including 2G/3G/4G. The broad frequency range and outstanding PIM rating is ideally suited for multi-band distributed antenna systems or in combination with RADIAFLEX® radiating cables.

Features / Benefits

- 4.3-10-female interfaces
- PIM optimized design (160dBc @2x43dBm)
- Ideal for all kind of DAS applications
- Low insertion loss
- High power handling

Technical Features

STRUCTURE

Product Type	Directional Hybrid Coupler
Number of Input Ports	4
Number of Output Ports	4
Connector Type	4.3-10 female

ELECTRICAL SPECIFICATIONS

Frequency Range	617 - 3800
Impedance	50 Ω
Return Loss (VSWR)	17.7 dB (1.3) @ - MHz
Intermodulation (IM3)	-160 dBc (2x43dBm)
Isolation min	25 dB @ 617 - 2700 MHz 22 dB @ 2701 - 3800 MHz

MECHANICAL SPECIFICATIONS

Height	61.7mm (2.429in)
Width	100.6mm (3.961in)
Length	305mm (12.008in)
Weight	3.4kg (7.496lb)

TEMPERATURE SPECIFICATIONS

Temperature Range	-25°C to 65°C (-13°F to 149°F)
-------------------	--------------------------------

TESTING AND ENVIRONMENTAL

Environmental Class	IP65
---------------------	------

