




RFS TPS* Tapper product family has been designed to support a variety of wireless applications in the frequency band from 694 to 3800MHz. The units couple off a defined fraction of a RF signal from typically 3 to 30 dB with minimal reflections or loss. The broad frequency range is ideally suited for 3G / 4G / 5G multi-band distributed antenna systems or in combination with RADIAFLEX® radiating cables. Notably, these products feature a low level of network interferences due to their PIM optimized desing.

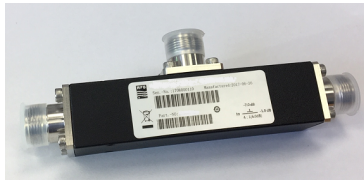

Features / Benefits

- **Split ratio 30:1 / 15dB**
- **4.3-10-female interfaces**
- **PIM optimized design (160dBc @2x43dBm)**
- **Low insertion loss**
- **High power handling**
- **Small size, Low weight**

Technical Features

STRUCTURE

Product Type	Unequal Divider/Tapper
Number of Input Ports	1
Number of Output Ports	2
Connector Type	4.3-10 female

MECHANICAL SPECIFICATIONS

Height	49.7mm (1.96in)
Width	19.5mm (0.77in)
Length	84.3mm (3.32in)

ELECTRICAL SPECIFICATIONS

Impedance	50 Ω
Frequency Range	694 - 3800 MHz
Return Loss (max. VSWR)	17.7 dB (1.3)
Insertion Loss max.	0.2 dB
Intermodulation (IM3)	160dBc (2x43dBm)
Coupling Value	15.3 dB
Total Input Power	400 W

TEMPERATURE SPECIFICATIONS

Temperature Range	-25°C to 65°C (-13°F to 149°F)
-------------------	--------------------------------

TESTING AND ENVIRONMENTAL

Environmental Class	IP65
---------------------	------

External Document Links

Notes